


大口径钢制管法兰和法兰盖(B系列)

LARGE DIAMETER STEEL PIPE FLANGES AND FLANGE COVERS (B SERIES)

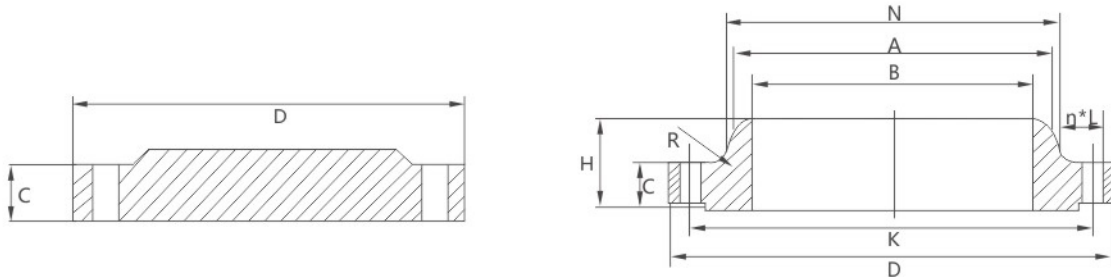


B系列大直径钢制管法兰和法兰盖

公称尺寸 Nominal size		A	连接尺寸 Diameter of contact face					厚度 Thickness		法兰 内径 Flange Inner Diameter	法兰颈 Neck		法兰 高度 Height
DN	NPS		法兰外径D Outside diameter D	中心圆直径K Center circle diameter K	螺栓孔直径L Bolt hole diameter L	螺栓孔数量n Bolt hole number n	螺栓Th Bolt Th	法兰C Flange C	法兰盖C Flange cover C		B	N	
Class150(PN20)													
650	26	661.9	785	744.5	22	36	M20	39.8	43.0		684	10	87
700	28	712.7	835	795.3	22	40	M20	43.0	46.2		735	10	94
750	30	763.5	885	846.1	22	44	M20	43.0	49.3		787	10	98
800	32	814.3	940	900.1	22	48	M20	44.6	52.5		840	10	106
850	34	865.1	1005	957.3	26	40	M24	47.7	55.7		892	10	109
900	36	915.9	1055	1009.6	26	44	M24	50.9	57.3		945	10	116
950	38	968.2	1125	1070.0	30	40	M27	52.5	62.0		997	10	122
1000	40	1019.0	1175	1120.8	30	44	M27	54.1	65.2		1049	10	127
1050	42	1069.8	1225	1171.6	30	48	M27	57.3	66.8		1102	11	132
1100	44	1120.6	1275	1222.4	30	52	M27	58.9	70.0		1153	11	135
1150	46	1171.4	1340	1284.3	33	40	M30	60.4	73.1		1205	11	143
1200	48	1222.2	1390	1335.1	33	44	M30	63.6	76.3		1257	11	148
1250	50	1273.0	1445	1385.9	33	48	M30	66.8	79.5		1308	11	152
1300	52	1323.8	1495	1436.7	33	52	M30	68.4	82.7		1360	11	156
1350	54	1374.6	1550	1492.2	33	56	M30	70.0	85.8		1413	11	160
1400	56	1425.4	1600	1543.0	33	60	M30	71.6	89.0		1465	14	165
1450	58	1476.2	1675	1611.3	36	48	M33	73.1	91.9		1516	14	173
1500	60	1527.0	1725	1662.1	36	52	M33	74.7	95.4		1570	14	178

大口径钢制管法兰和法兰盖(B系列)

LARGE DIAMETER STEEL PIPE FLANGES AND FLANGE COVERS (B SERIES)

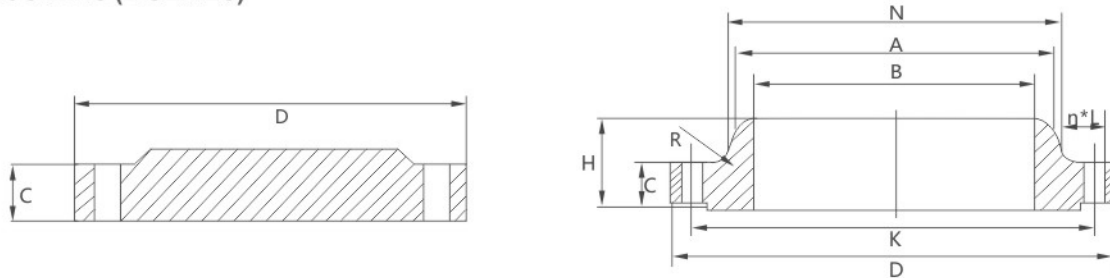

B系列大直径钢制管法兰和法兰盖

公称尺寸 Nominal size		焊端 外径 Welding End Outer Diameter	连接尺寸 Diameter of contact face					厚度 Thickness		法兰 内径 Flange Inner Diameter	法兰颈 Neck		法兰 高度 Height
DN	NPS	A	法兰外径D Outside diameter D	中心圆直径K Center circle diameter K	螺栓孔直径L Bolt hole diameter L	螺栓孔数量n Bolt hole number n	螺栓Th Bolt Th	法兰C Flange C	法兰盖C Flange cover C	B	N	R	H
Class300(PN50)													
650	26	665.2	865	803.3	36	32	M33	87.4	87.4	与 钢 管 内 径 一 致	702	14	143
700	28	716.0	920	857.2	36	36	M33	87.4	87.4		756	14	148
750	30	768.4	990	920.8	39	36	M36X3	92.1	92.1		813	14	156
800	32	819.2	1055	977.9	42	32	M39X3	101.6	101.6		864	16	167
850	34	870.0	1110	1031.9	42	36	M39X3	101.6	101.6		918	16	171
900	36	920.8	1170	1089.0	45	32	M42X3	101.6	101.6		965	16	179
950	38	971.6	1220	1139.8	45	36	M42X3	109.6	109.6		1016	16	191
1000	40	1022.4	1275	1190.6	45	40	M42X3	114.3	114.3		1067	16	197
1050	42	1074.7	1335	1244.6	48	36	M45X3	117.5	117.5		1118	16	203
1100	44	1125.5	1385	1295.4	48	40	M45X3	125.5	125.5		1173	16	213
1150	46	1176.3	1460	1365.2	51	36	M48X3	127.0	128.6		1229	16	221
1200	48	1227.1	1510	1416.0	51	40	M48X3	127.0	133.4		1278	16	222
1250	50	1277.9	1560	1466.8	51	44	M48X3	136.6	138.2		1330	16	233
1300	52	1328.7	1615	1517.6	51	48	M48X3	141.3	142.6		1383	16	241
1350	54	1379.5	1675	1578.0	51	48	M48X3	145.0	147.7		1435	16	238
1400	56	1430.3	1765	1651.0	60	36	M56X3	152.4	155.4		1494	17	267
1450	58	1481.1	1825	1712.9	60	40	M56X3	152.4	160.4	1548	17	273	
1500	60	1557.3	1880	1763.7	60	40	M56X3	149.3	165.1	1599	17	270	
Class600(PN110)													
650	26	660.4	890	806.4	45	28	M42X3	111.2	111.3	与 钢 管 内 径 一 致	698	13	181
700	28	711.2	950	863.6	48	28	M45X3	115.9	115.9		752	13	190
750	30	762.0	1020	927.1	51	28	M48X3	125.5	127.0		806	13	205
800	32	812.8	1085	984.2	55	28	M52X3	130.2	134.9		860	13	216
850	34	863.6	1160	1054.1	60	24	M56X3	141.3	144.2		914	14	233
900	36	914.4	1215	1104.9	60	28	M56X3	146.1	150.9		968	14	243
Class900(PN150)													
650	26	660.4	1020	901.7	68	20	M64X3	135.0	154.0	与 钢 管 内 径 一 致	743	11	259
700	28	711.2	1105	971.6	74	20	M70X3	147.7	166.7		797	13	276
750	30	762.0	1180	1035.0	80	20	M76X3	155.6	176.1		851	13	289
800	32	812.8	1240	1092.2	80	20	M76X3	160.4	186.0		908	13	303
850	34	863.6	1315	1155.7	86	20	M82X3	171.5	195.0		962	14	319
900	36	914.4	1345	1200.2	80	24	M76X3	173.1	201.7		1016	14	325